


R3CFEMELLE COAX CAB 5/75


PACKAGING REEL 3000

R299.197.260

STANDARD CABLE

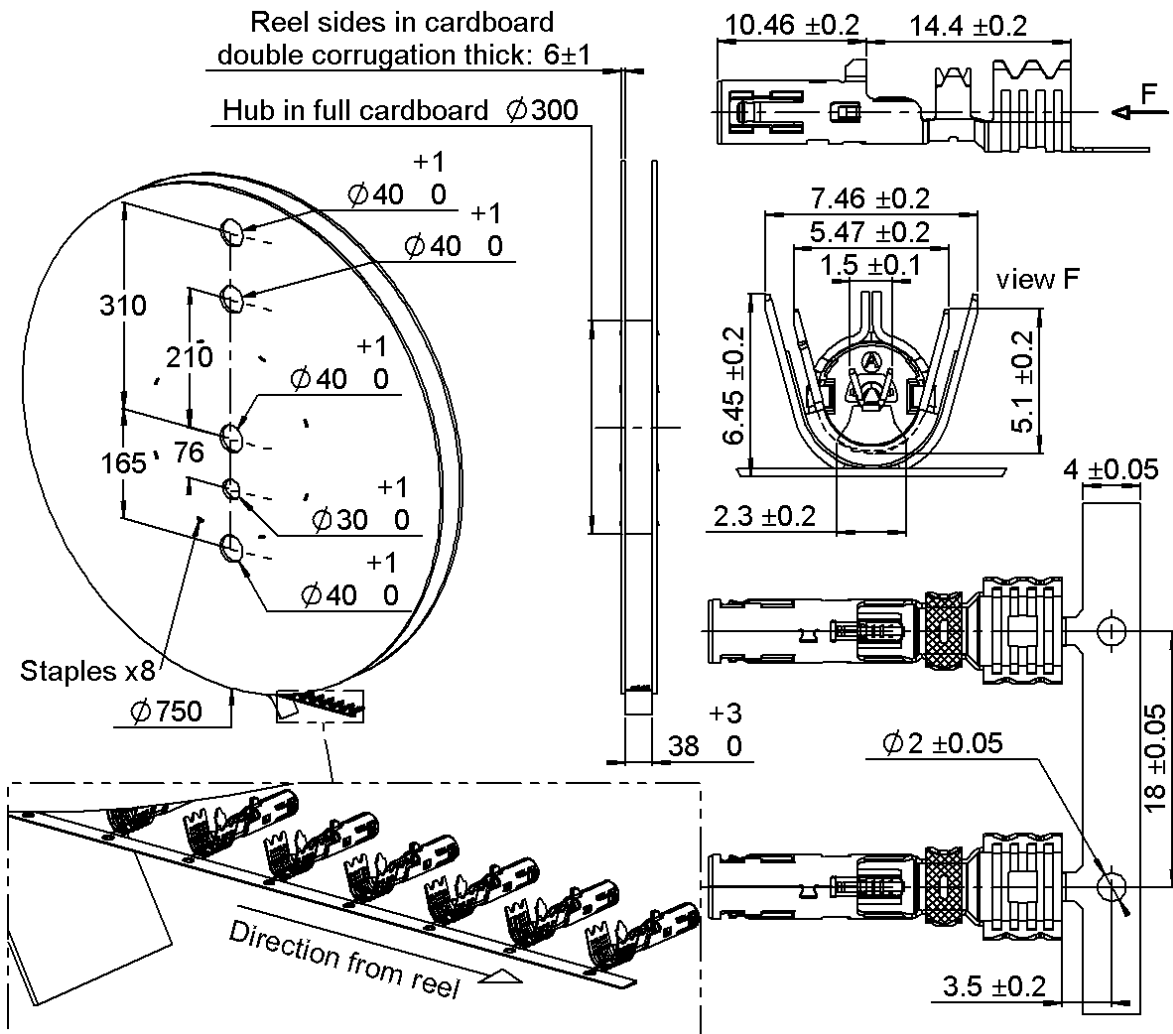

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)	
BODY	BRONZE	TIN 3 OVER NICKEL 2	
CENTER CONTACT	BRONZE	SELECTIVE GOLD+ SELECTIVE TIN	
OUTER CONTACT	-	UL CLASSIFICATION	COLOR
INSULATOR	POLYMER	UL94-V0	NATURAL
	-		

Standard Packaging : 3000+/-2%\*

\* Nota : possibility of having a maximum of five missing parts consecutively on the tape

Issue : 1408 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




R3CFEMELLE COAX CAB 5/75

R299.197.260

PACKAGING REEL 3000

STANDARD CABLE

**Recommended stripping dimensions of the RG59 cable for R3C female R299.197.260**

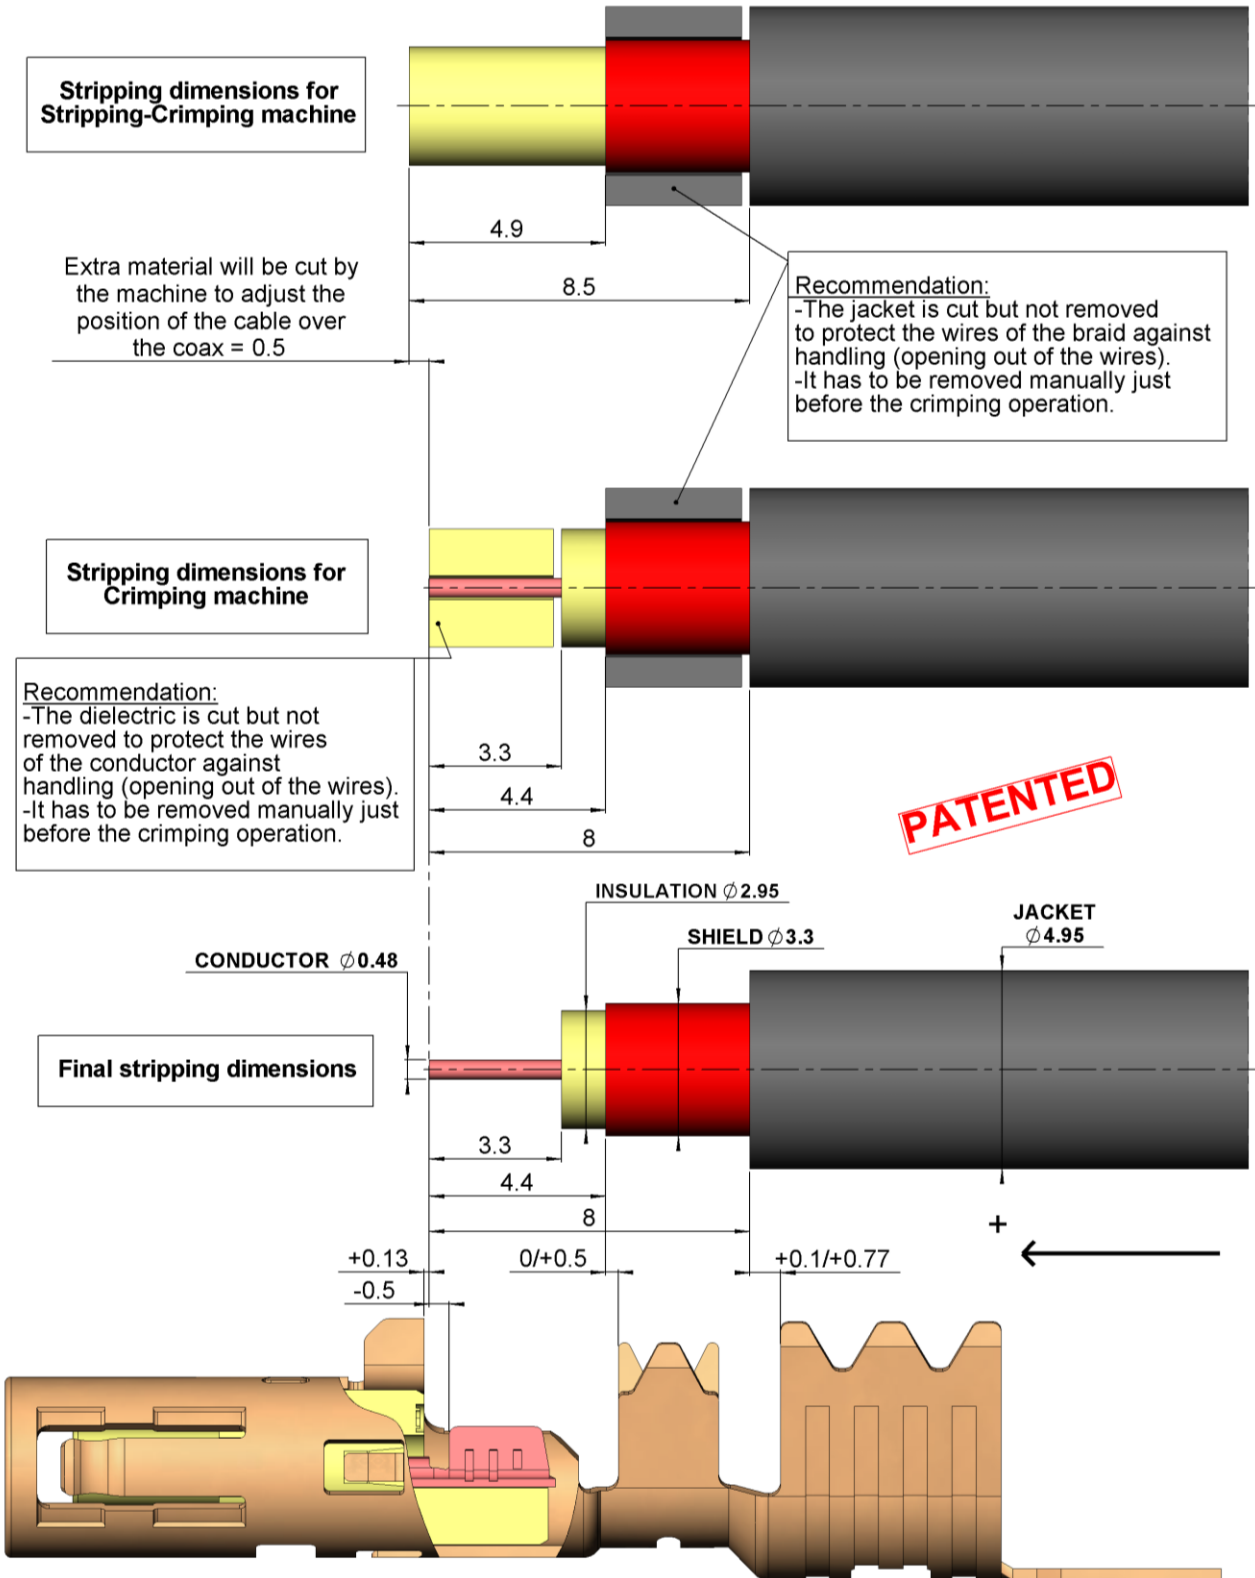

Issue : 1408 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



R3CFEMELLE COAX CAB 5/75

PACKAGING REEL 3000

**R299.197.260**

STANDARD CABLE

crimping height **				
Conductor type	conductor/body W	Conductor X	braid Y	jacket Z
stranded	2.47±0.07	0.79±0.05	3.55±0.05	4.8+0.05/-0.1

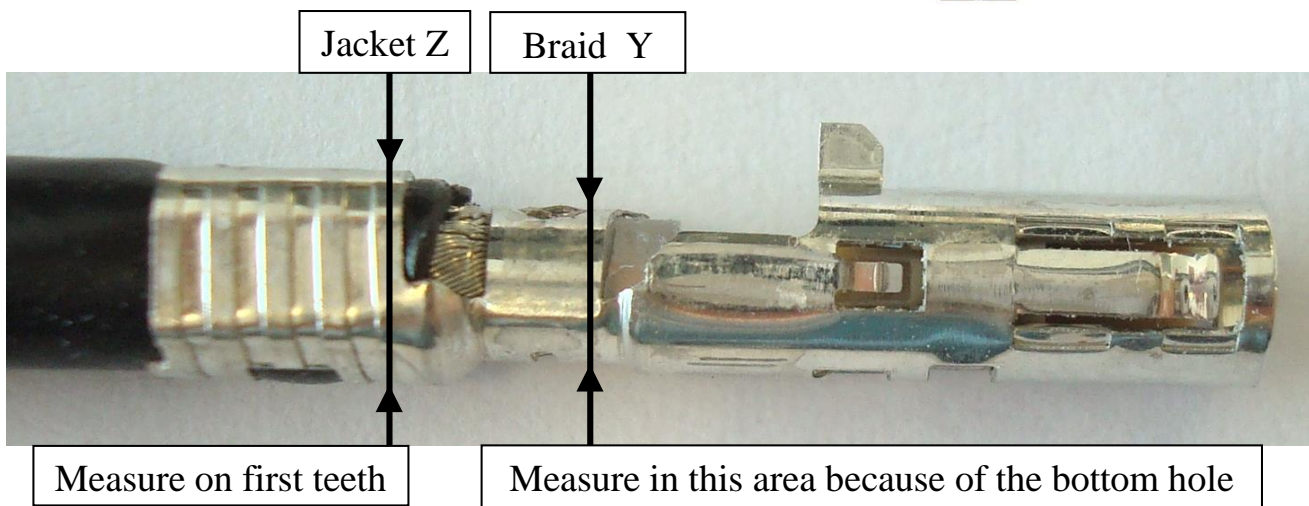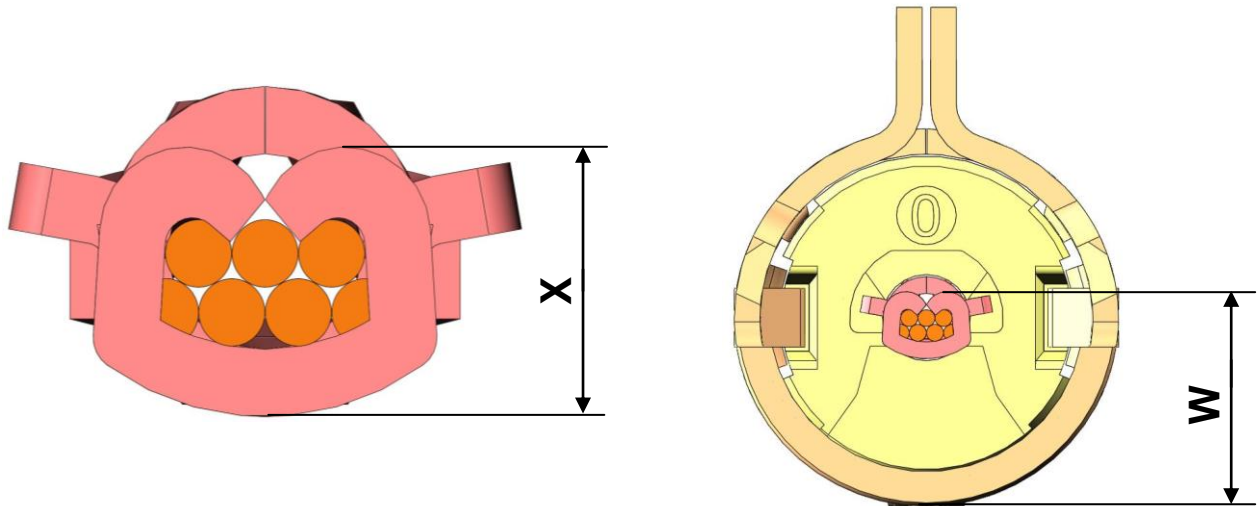

**\*\* CAUTION**

- Before using applicator, make sure the press is calibrated :135,8 mm from the lower dead point up to the base
- Crimping height may change depending on the manufacturer of the cable, for more informations please contact us
- We recommend to make electrical test after each set up of the applicator:
  - Outer and center contact continuity+Dielectric withstanding voltage 800Vrms, 50Hz
  - Insulation resistance 1000 Mohms
  - Cable retention = 110Newton mini during 5 seconds with electrical continuity

Issue : 1408 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

