





R/A R3C FEMALE COAX CAB 5/75
CONDITIONNEMENT BOBINE 2000

R299.197.660
STANDARD CABLE

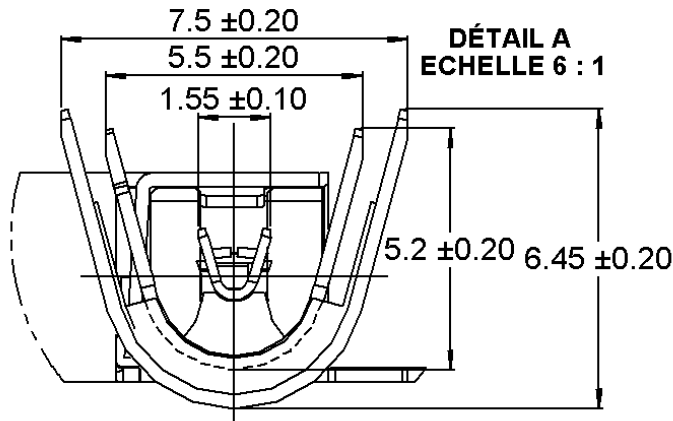


Reel sides in cardboard double corrugation thick 6±1
 Flasques carton double cannelure ep 6±1


Hub in full cardboard $\phi 300$
 Moyeu carton plein $\phi 300$

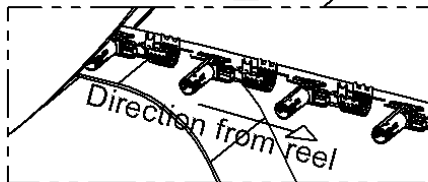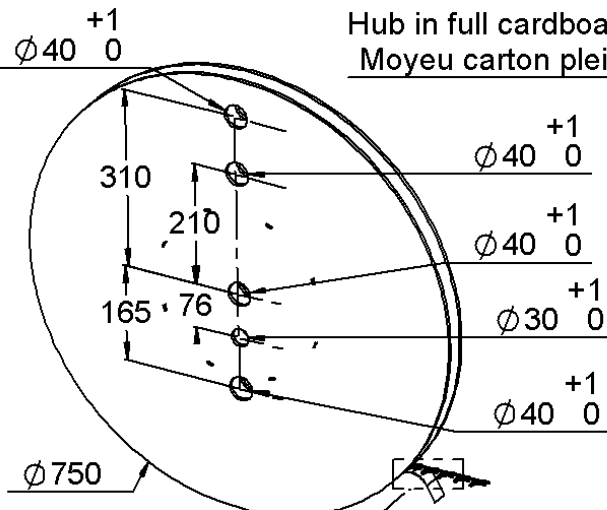

All dimensions are in mm.

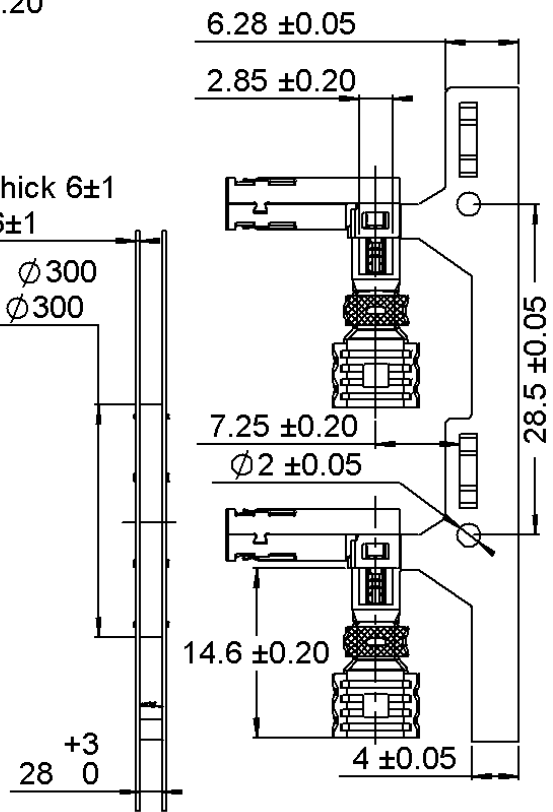

THIS COAX CAN BE USED WITH HOUSING R197.125._81 (replace the _ by the coding letter)



COMPONENTS	MATERIALS	PLATING (μm)	
BODY	BRONZE	TIN 3 OVER NICKEL 2	
CENTER CONTACT	BRONZE	SELECTIVE GOLD+ SELECTIVE TIN	
OUTER CONTACT	-	UL CLASSIFICATION	COLOR
INSULATOR	POLYMER	UL94-V0	NATURAL

Standard Packaging : 2000+/-2%*

* Nota : possibility of having a maximum of five missing parts consecutively on the tape

Issue : 1408 C


In the effort to improve our products, we reserve the right to make changes judged to be necessary.



R/A R3C FEMALE COAX CAB 5/75
 CONDITIONNEMENT BOBINE 2000

R299.197.660
 STANDARD CABLE

**Recommended stripping dimensions of the
 RG59 cable for right angle R3C female R299.197.660**

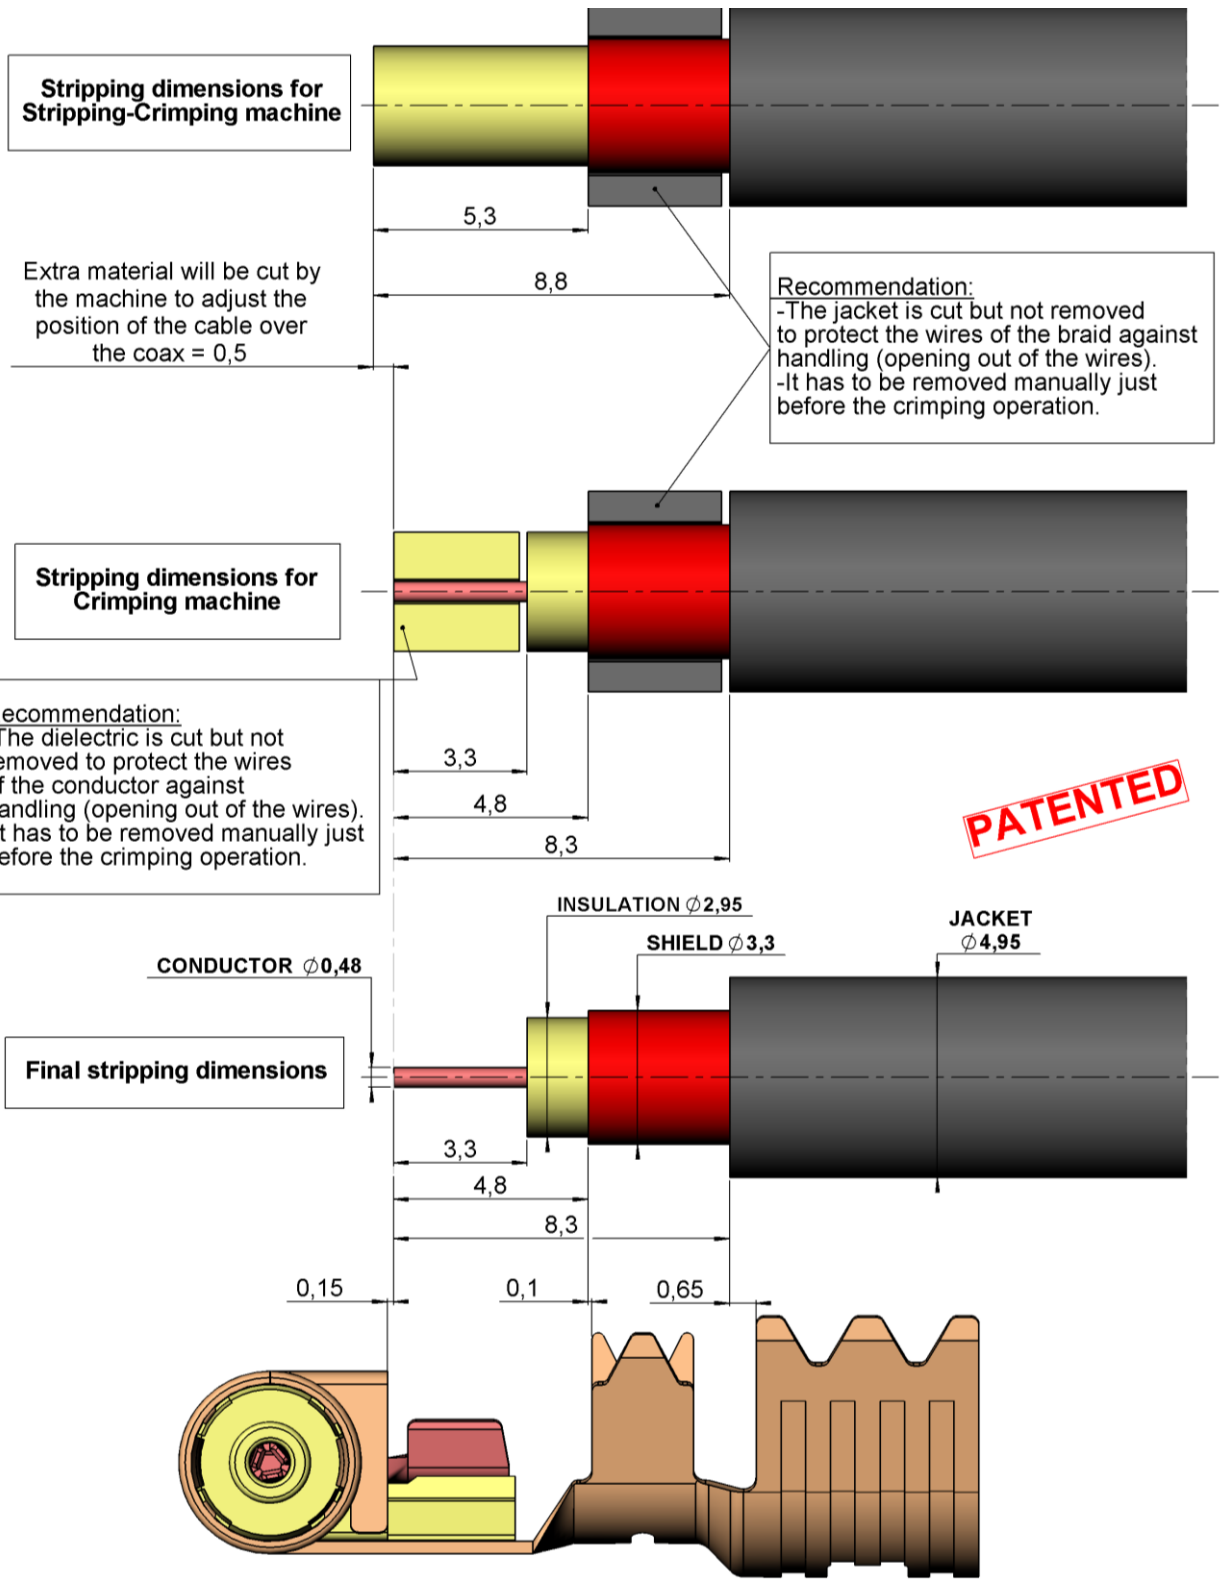

Issue : 1408 C




In the effort to improve our products, we reserve the right to make changes judged to be necessary.




R/A R3C FEMALE COAX CAB 5/75
 CONDITIONNEMENT BOBINE 2000

R299.197.660
 STANDARD CABLE

crimping height **				
Conductor type	conductor/body W	Conductor X	braid Y	jacket Z
Stranded	2.47±0.07	0.79±0.05	3.55±0.05	4.8+0.05/-0.1

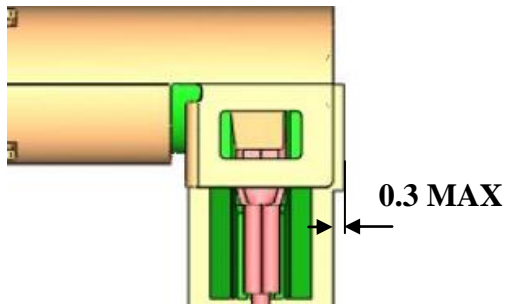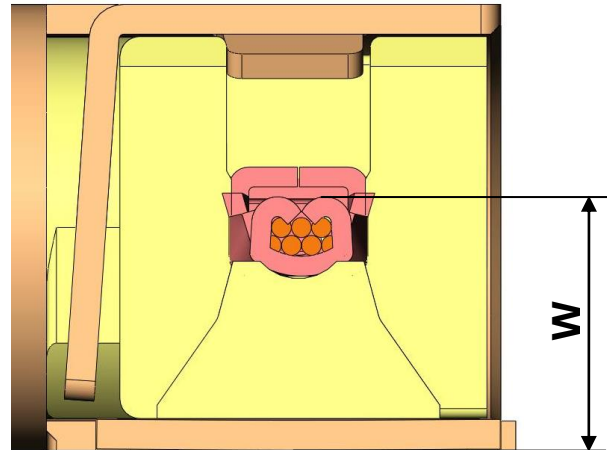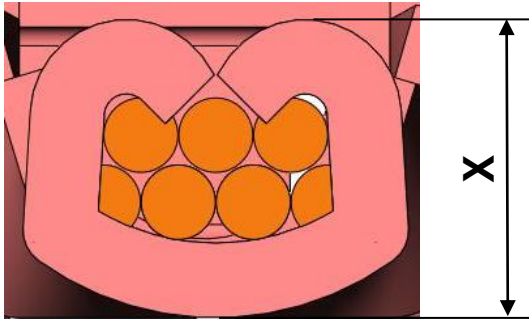

Length of the cutting tab (after crimping)

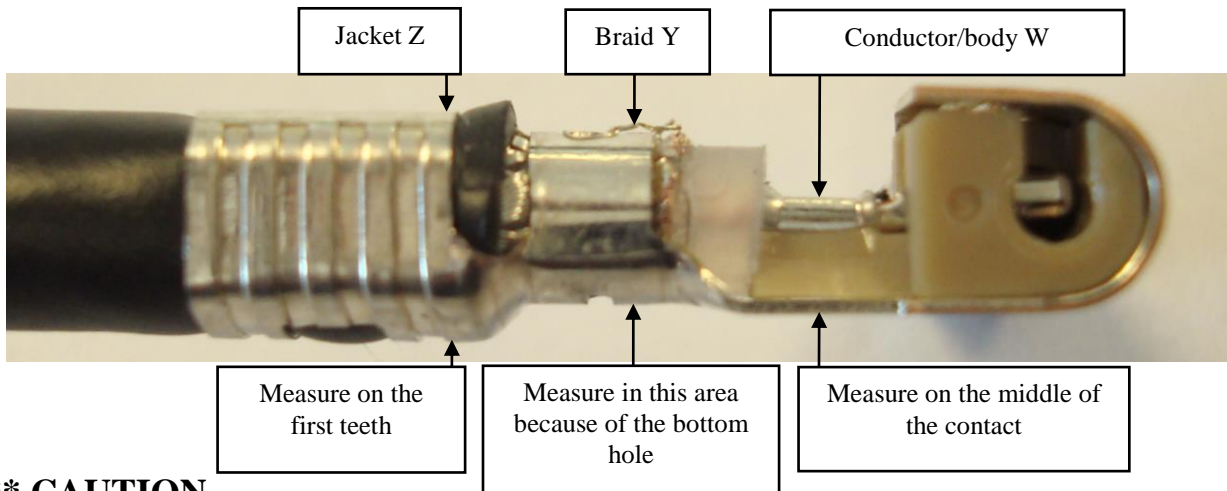

**** CAUTION**

-Before using applicator, make sure the press is calibrated :135,8 mm from the lower dead point up to the base

-Crimping height may change depending on the manufacturer of the cable, for more informations please contact us

-We recommend to make electrical test after each set up of the applicator:

Outer and center contact continuity+Dielectric withstanding voltage 800Vrms, 50Hz
 Insulation resistance 1000 Mohms

Cable retention = 110Newton mini during 5 seconds with electrical continuity

Issue : 1408 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

