


**R3C MALE COAX CAB 2.6/50**

**PACKAGING REEL 3000**

**R299.197.000**

**STANDARD CABLE**

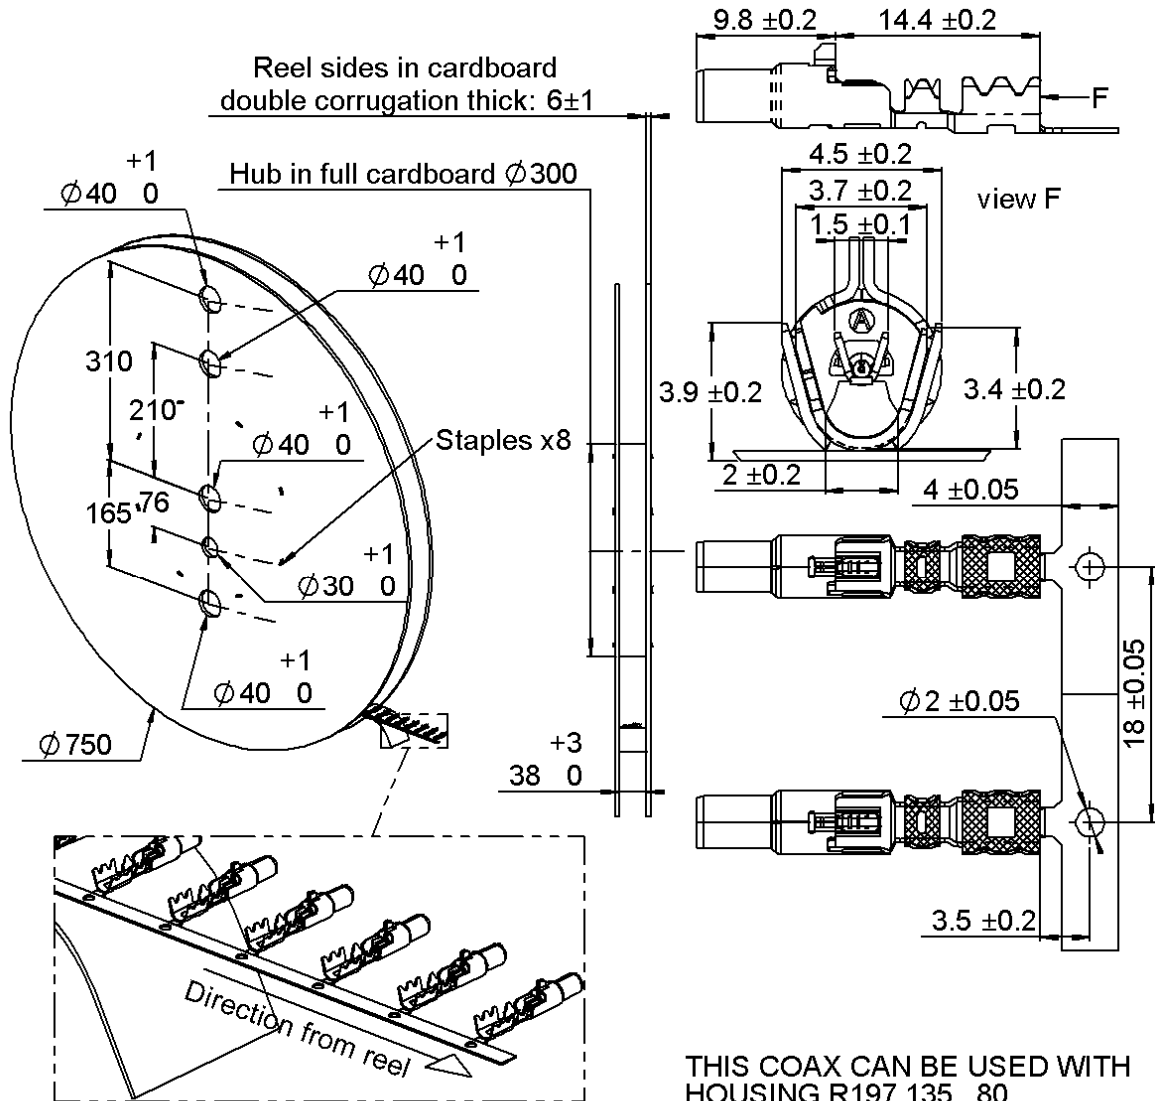

THIS COAX CAN BE USED WITH HOUSING R197.135\_80 (replaced the \_ by the coding letter)

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING
BODY	BRONZE	TIN OVER NICKEL PRE-PLATED SELECTIVE GOLD+ SELECTIVE TIN
CENTER CONTACT	BRONZE	
OUTER CONTACT	-	UL CLASSIFICATION   COLOR
INSULATOR	POLYMER	

**Standard Packaging : 3000+/-2%\***

\* Nota : possibility of having a maximum of five missing parts consecutively on the tape

Issue : 1623 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




R3C MALE COAX CAB 2.6/50

R299.197.000

PACKAGING REEL 3000

STANDARD CABLE

**Recommended stripping dimensions of the RG174 cable for R3C male R299.197.000**

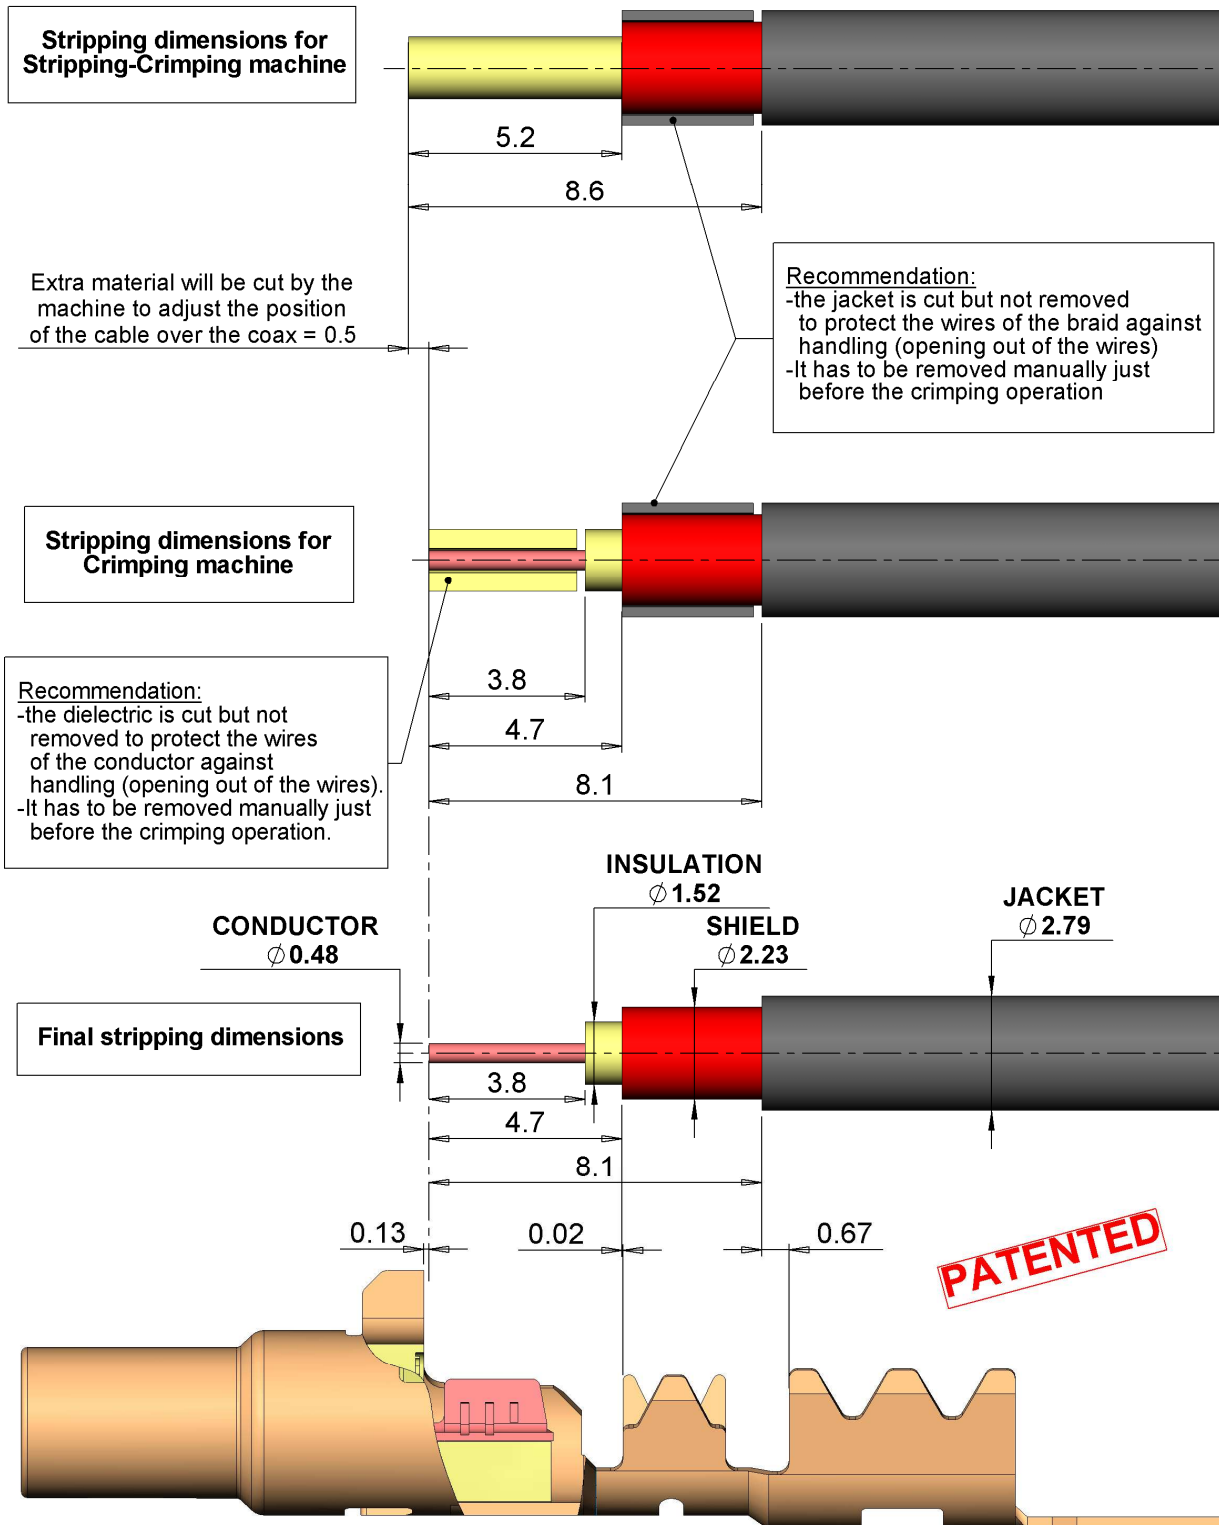

Issue : 1623 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


**R3C MALE COAX CAB 2.6/50**

**PACKAGING REEL 3000**


**R299.197.000**

**STANDARD CABLE**

crimping height **				
Conductor type	Conductor/body W	Conductor X	Braid Y	Jacket Z
Stranded	2.32±0.05	0.82±0.05	2.32±0.05	2.8 +0.1/-0.03

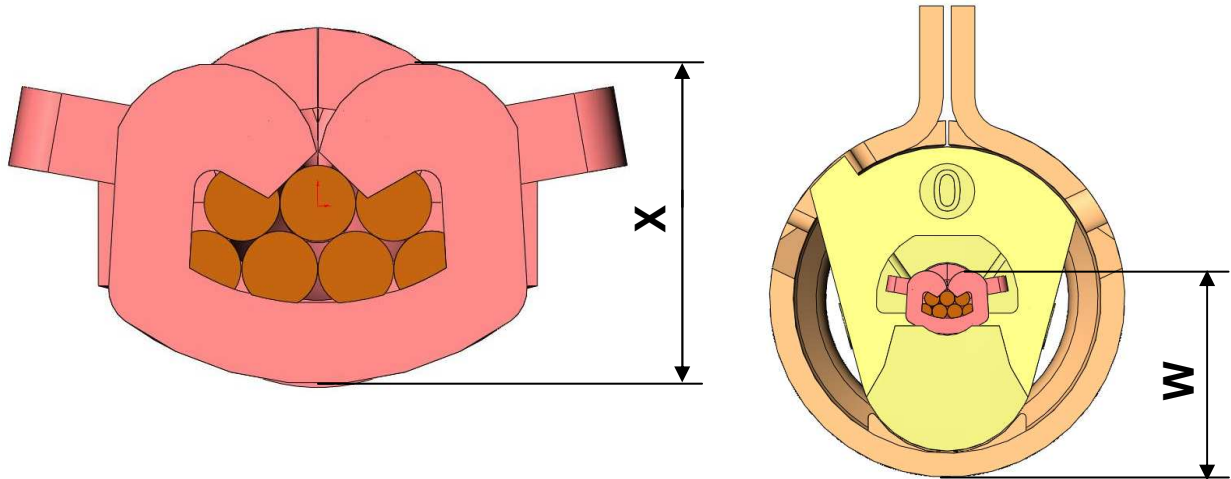

Jacket Z      Braid Y

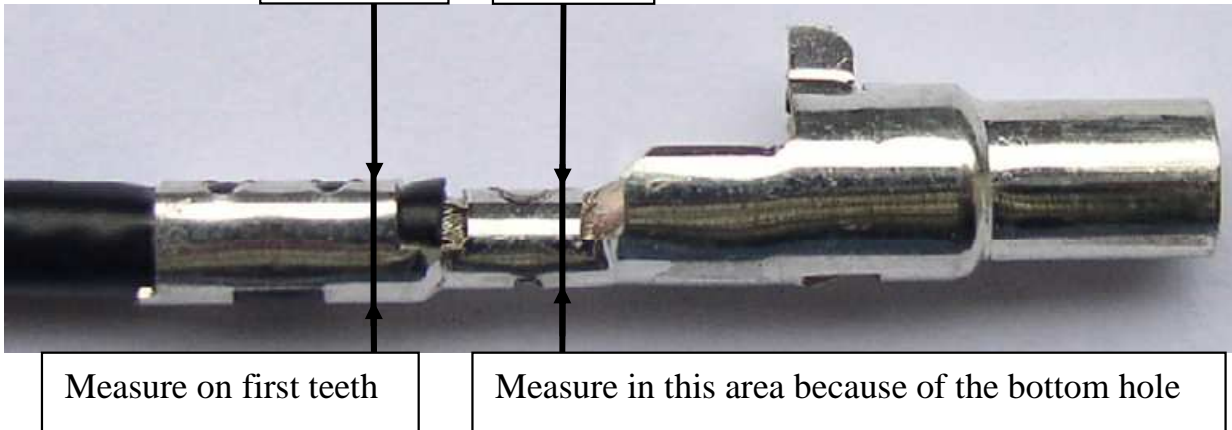

**\*\* CAUTION**

-Before using applicator, make sure the press is calibrated :135.8 mm from the lower dead point up to the base

-Crimping height may change depending on the manufacturer of the cable, for more informations please contact us

-We recommend to make electrical test after each set up of the applicator:

Outer and center contact continuity+Dielectric withstanding voltage 800Vrms, 50Hz

Insulation resistance 1000 Mohms

Cable retention = 110Newton mini during 5 seconds with electrical continuity

Issue : 1623 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

